


Foam Pad Hood Universal (FPHU) Dock Seal

Competitive Product Comparison

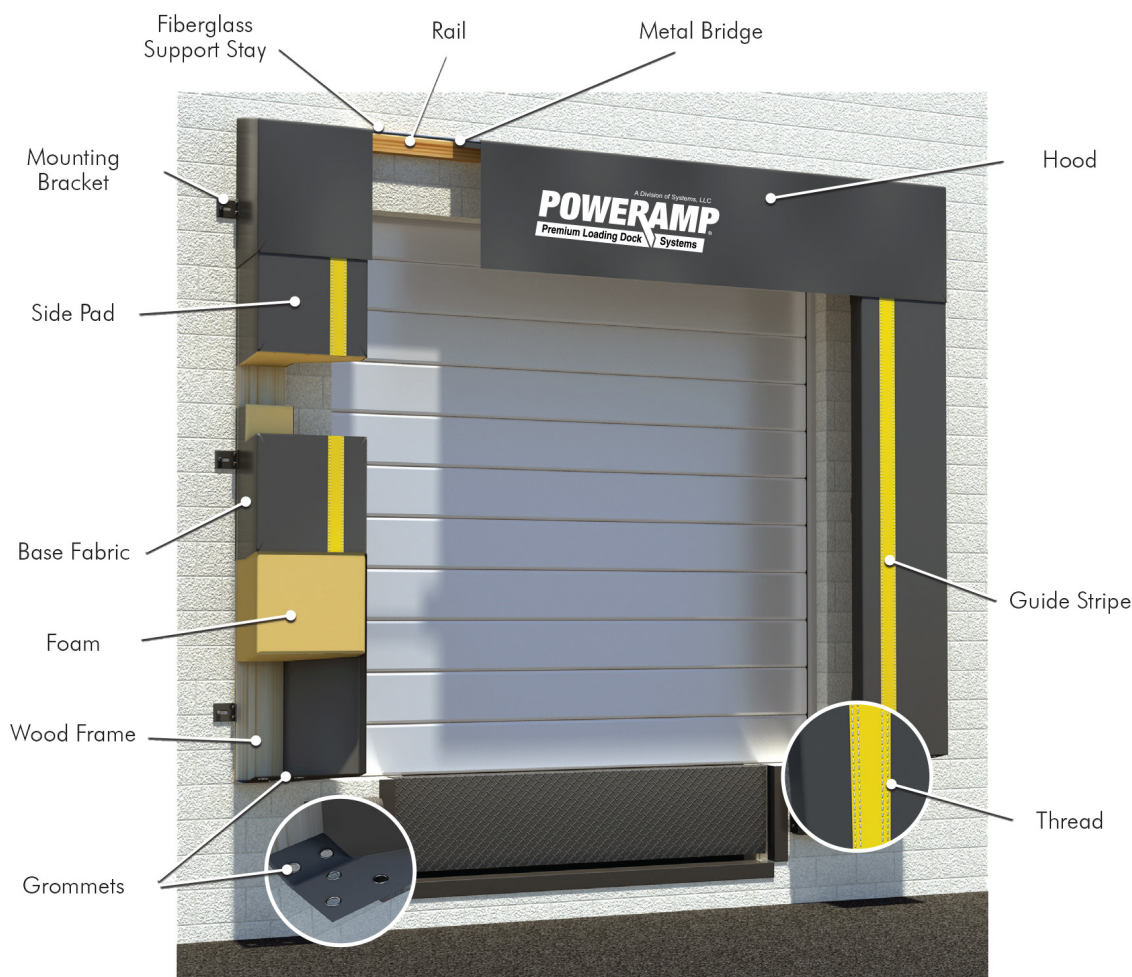

FEATURES

- Designed for door openings up to 10 x 12-feet
- Hood-style head curtain with a standard 24-inch drop (customizable to any length)
- High-density polyurethane compression L-shaped side pads
- Side pads have a 16-inch standard projection
- L-shaped side pads provide full-width trailer access
- Pressure-treated, kiln-dried wood frame
- Foam is chemically bonded to the frame
- Standard full-height yellow guide stripes
- Heavy-duty galvanized mounting hardware
- Pads are vented for air and moisture release
- Top-grade fabrics provide superior performance and maximum durability
- Velcro® attachments
- All sew lines are lock-stitched and reinforced with UV-resistant thread

BUILT TO LAST

All Poweramp Dock Seal standard frames are made from pressure-treated and kiln-dried wood for greater moisture resistance and enhanced durability.

Dock Seal	Pressure-Treated, Kiln-Dried Wood Frame	
Poweramp FPHU	Yes	Green dot
Competitor #1	No	Red dot
Competitor #2	No	Red dot
Competitor #3	No	Red dot



WARNING: Cancer and Reproductive Harm-www.P65Warnings.ca.gov

Foam Pad Hood Universal (FPHU) Dock Seal

Competitive Product Comparison


FASTER, EASIER REPAIRS

Unlike competitors who fully wrap the wood backing, the FPHU Dock Seal is stitched along the sides for cleaner removal of cover fabrics, easier recovers and less dock downtime.



GREATER TRAILER ACCESS & A MORE RELIABLE SEAL

The unique L-pad feature of the FPHU seals against the side of the truck, allowing unobstructed access to the trailer and less pressure on the building wall.

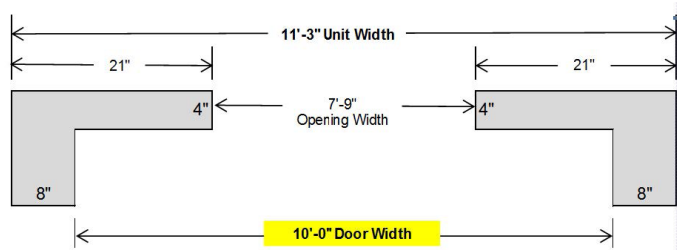

TESTED & PROVEN TO PERFORM

Poweramp cover materials and fabrics have undergone rigorous testing and feature the highest puncture, tear and abrasion resistance in the industry.

FABRIC PROPERTIES & COLORS					
FABRIC	ABRASION RESISTANCE (cycles) Fed Std 5306 / ASTM D3884	TENSILE STRENGTH (lbs./in.) Fed Std 5100 / ASTM D751	TEAR STRENGTH (lbs., WxL) Fed Std 5134 / ASTM D2261	COLD RESISTANCE (at -40°F) Fed Std 5874 / ASTM D2136	COLORS
MAX-1000™	65000	1000 x 1000	200 x 200	Pass	
MAX-60™	3000	950 x 850	160 x 130	Pass	
40 oz. NOVALON™	1500	400 x 350	50 x 50	Pass	
16 oz. NOVALON™	100	400 x 350	50 x 40	Pass	
40 oz. Vinyl	3000	950 x 850	160 x 130	Pass	
22 oz. Vinyl	1850	695 x 650	120 x 100	Pass	

W194N11481 McCormick Dr. | Germantown, WI 53022
poweramp.com | sales@poweramp.com
800-643-5424



poweramp.com

COMP PRDCT FPHU 07/2025

Designed, Engineered, and Manufactured in the U.S.A.
© 2025 Systems, LLC/Poweramp
Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation.

Let Poweramp help you find the best solution for your operation.

