


# Bar Lift Barrier Specification Sheet and Submittal

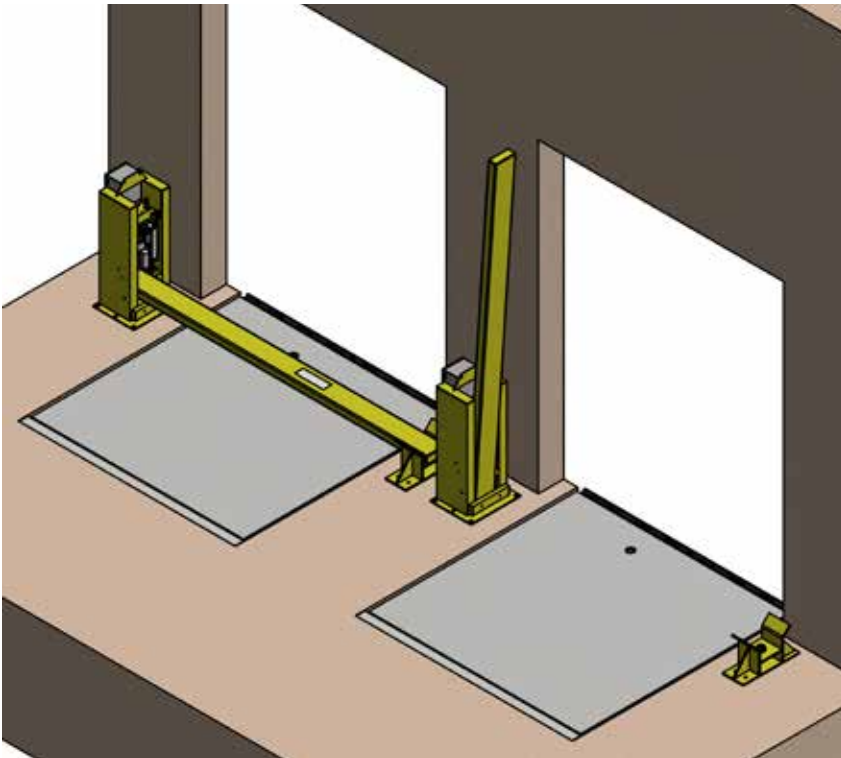

Poweramp's Bar Lift Barrier prevents lift trucks from driving over the dock's edge. Hydraulic operation provides years of trouble-free service. Units can be installed with mechanical, pneumatic, and hydraulic dock levelers or where no levelers are present. The Bar Lift Barrier is rated to withstand impacts from a 10,000 lb load moving at 4 mph. Standard unit (including stanchion, arm and receiver pocket): 12'1" wide. Customized widths available. Gusseted models also available to prevent fork damage to bottom panel of overhead door. Unit ships with anchors needed for installation.

### STANDARD FEATURES FOR THE BAR LIFT BARRIER

- Push button activation
- 1 ½ HP self-contained power unit, 115 volt, single phase standard
- Rated to withstand 10,000 lbs of force at 4mph
- Protects overhead door from damage
- Prevents fork lift from falling off loading dock
- Power up and power down control

### COMMON OPTIONS

- Interlock with dock leveler
- Three phase electrical
- Fork under-ride protection
- Special paints



Customer: _____ Job: _____ Location: _____ Number of Units: _____ Voltage/Phase: _____ Represented By: _____ SalesRep: _____	Certified For Construction: By: _____ Date: _____ Company: _____ City & State: _____ Drawing #: _____
--	--

SS B2B 08/17

A continuing product improvement process is in effect at Systems, Inc. We reserve the right to make product changes without prior notice.